
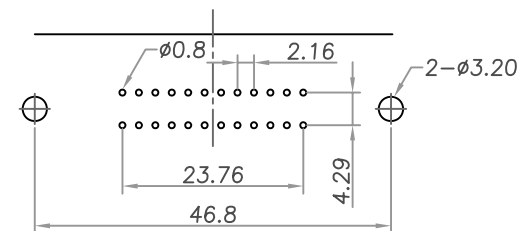
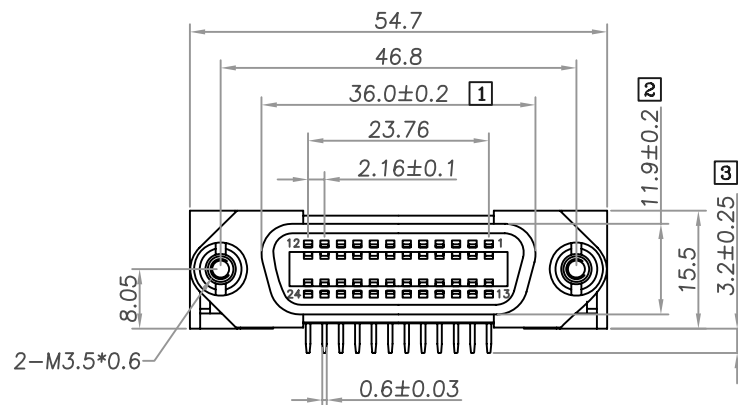



RoHS COMPLIANT

REV	DATE	DESCRIPTION
A	05/02/'18	(Official Drawing)

Material & Finish

- SHELL:
Steel, Nickel Plated
- PIN CONTACT:
Phosphor Bronze
Gold Flash Plated
- INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0 Blue
- ROUND SCREW:
Stainless, No Plated
- BREACH WASHER:
Stainless, No Plated
- L SHAPE:
Steel, Nickel Plated
- CURRENT RATING:
3 Amp
- CONTACT RESISTANCE:
30mΩ Max
- DIELECTRIC STRENGTH:
1000VAC for one minute
- INSULATOR RESISTANCE:
1000MΩ Min. (at 500VDC)
- TEMPERATURE:
-55°C to +105°C

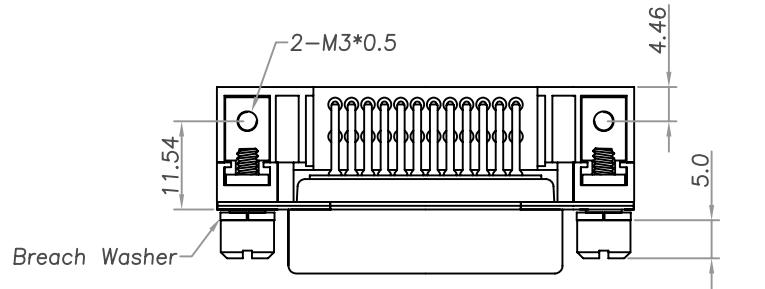

RECOMMENDED LAYOUT

NOTE: 版更需通知客戶

FU-YAO TECHNOLOGY CO., LTD.
復堯科技股份有限公司

MODEL NAME:
CENTRONIC PCB R/A TYPE 24PIN
FEMALE 3.2, M3.5 ROUND SCREW
LOCK M3 L SHAPE

MARK EXPLAIN:
⚠:Revision Change
①:Important Dimension
①:Note

TOLERANCE:
0.00:
0.00 : ±0.20
0.0 : ±0.30
0. : ±0.40
ANGLE: ±3.0°

UNIT: mm

PART NO. RR2-24SBAAGGS000

APPROVED BY: ALBERTA

CHECKED BY: EDEA

DRAW BY: ALAN

FILE NO. FIG03127

SCALE: 1/1

DATE: 1070502