


3P APPEARANCE

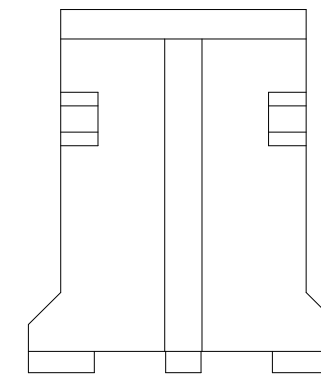

2P APPEARANCE

SPECIFICATIONS

Current Rate: 2A AC/DC
 Voltage Rate: 100V AC/DC
 Insulation Resistance: 1000MΩ min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 800V AC for 1 minute
 Operation Temperature: -25℃ ~ +85℃

MATERIAL

Insulator: Nylon 66 ,UL94V-0



Poles	Dimension		
	A	B	C
2	2.00	5.80	4.60
3	4.00	7.80	6.60
4	6.00	9.80	8.60
5	8.00	11.80	10.60
6	10.00	13.80	12.60
7	12.00	15.80	14.60
8	14.00	17.80	16.60
9	16.00	19.80	18.60
10	18.00	21.80	20.60
11	20.00	23.80	22.60
12	22.00	25.80	24.60
13	24.00	27.80	26.60
14	26.00	29.80	28.60
15	28.00	31.80	30.60
16	30.00	33.80	32.60

Ordering Information

HG XX 1124 1 -81

2.0Ph Housing PIN No.

1: Bag Packing

REV.	REVISION RECORD	DATE	General Tolerance	
A	Original	11/09/17"	LINEAR 0.0 ±0.25	ANGLE ±3°
B	Revised	02/09/22"	0.00 ±0.20	
			⊕	UNIT:mm
			A4	NAME
			APPROVED	KENNY
			CHECKED	GRACE
			DESIGNER	CHAOSHIN



TITLE: 2.0mm Pitch Housing 6.8L

DWG.NO: HGXX11241-81 REV. B

SCALE 1 : 1 SHEET 1 OF 1