


Poles	DIM.A	DIM.B	DIM.C
2x2	2.0	4.4	5.9
2x3	4.0	6.4	7.9
2x4	6.0	8.4	9.9
2x5	8.0	10.4	11.9
2x6	10.0	12.4	13.9
2x7	12.0	14.4	15.9
2x8	14.0	16.4	17.9
2x9	16.0	18.4	19.9
2x10	18.0	20.4	21.9
2x11	20.0	22.4	23.9
2x12	22.0	24.4	25.9
2x13	24.0	26.4	27.9
2x14	26.0	28.4	29.9
2x15	28.0	30.4	31.9
2x16	30.0	32.4	33.9
2x17	32.0	34.4	35.9
2x18	34.0	36.4	37.9
2x19	36.0	38.4	39.9
2x20	38.0	40.4	41.9

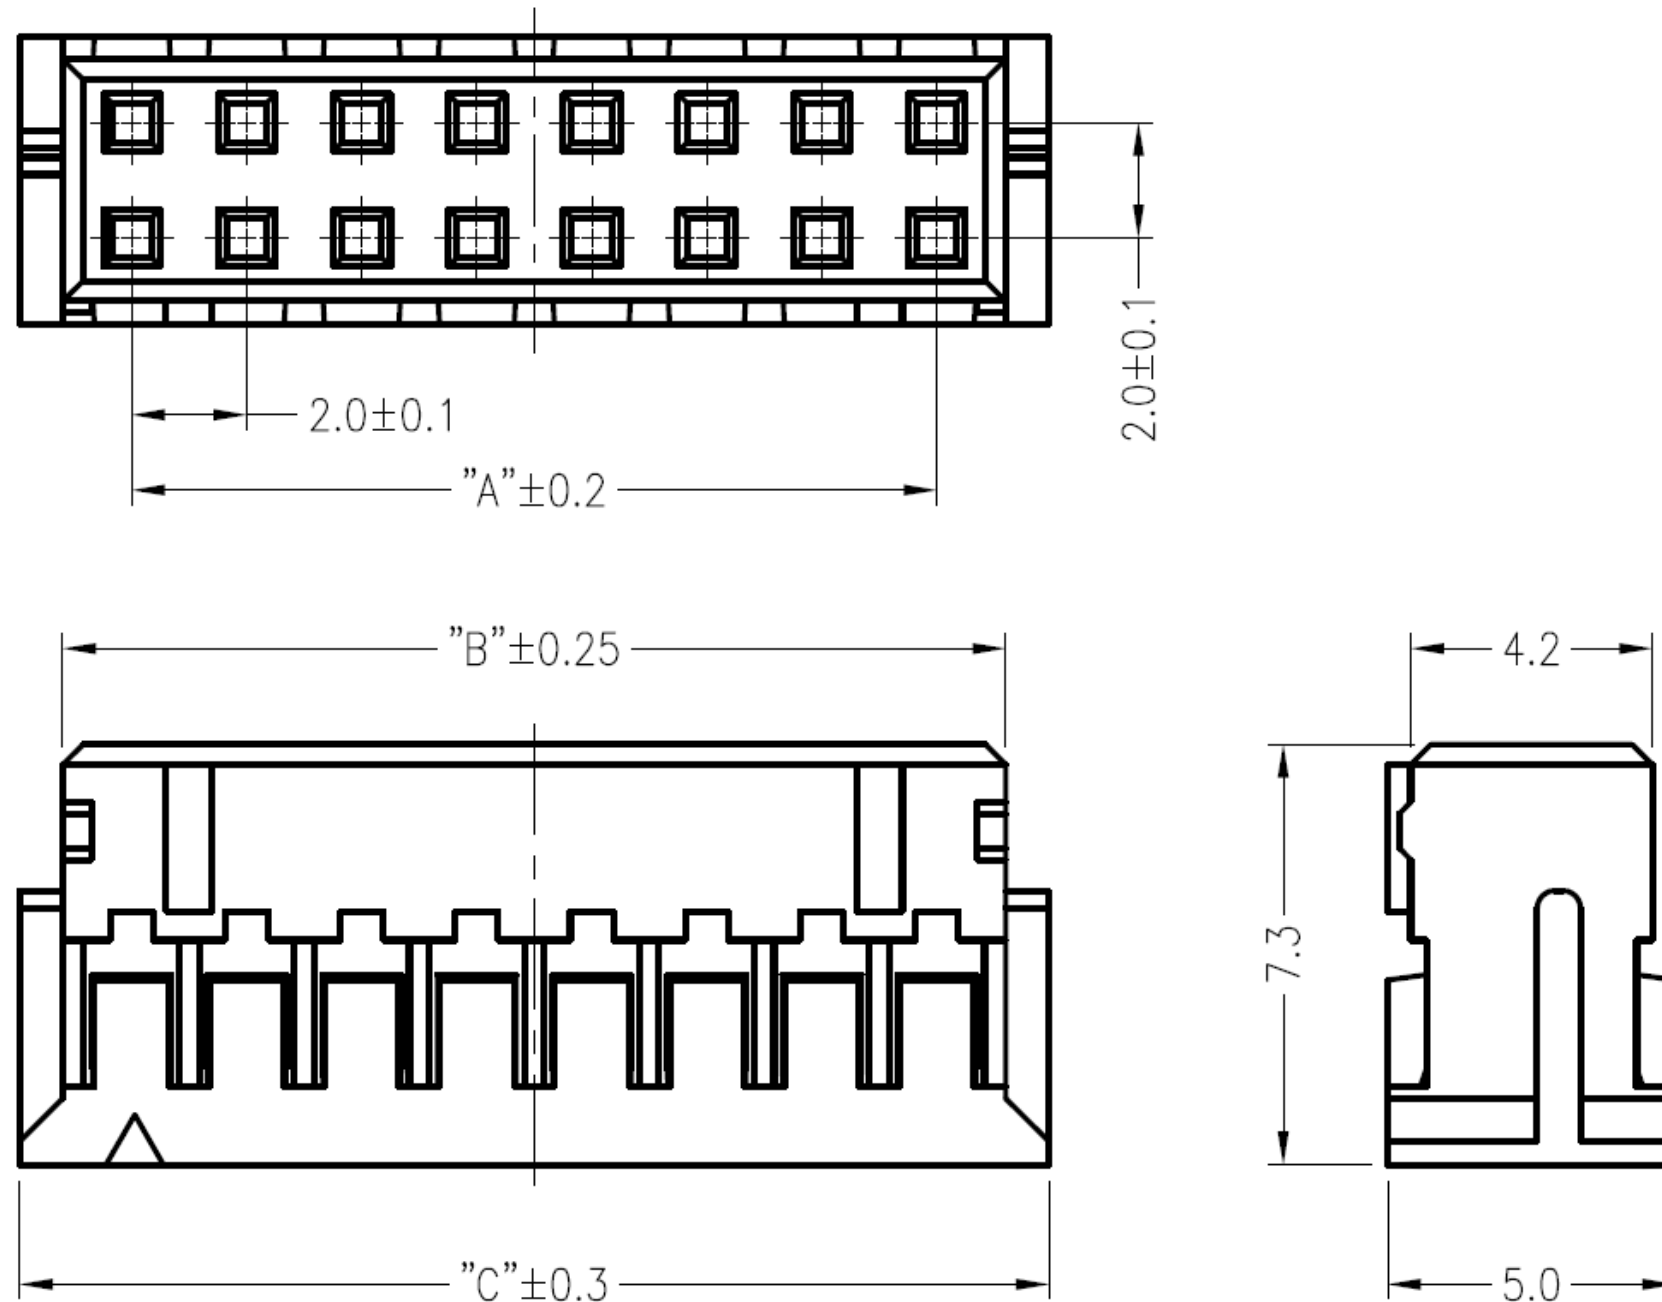

**SPECIFICATION:**

- Voltage rating:  
AC, DC, 250V(rms)
- Current rating:  
3A
- Withstand voltage:  
800V AC/minute
- Working Temperature:  
-25°C~ +85°C
- Insulation resistance:  
≥1000MΩ
- Contact resistance:  
≤20mΩ
- Terminal mtr'l:  
BRASS
- Material:  
Housing-PA66,UL94V-0
- Applicable Wire:  
AWG #28~ AWG #22

RoHS  
Compliant

**Ordering Information**

**HG XX YENY 1 - 44**  
 2.0Ph Housing    PIN No    1: Bag Packing

REV.	REVISION RECORD	DATE	General Tolerance	
A	Original	02/14/22	LINEAR	0.0 ±0.25
				ANGLE ±3°
				0.00 ±0.20
			UNIT: mm	
			A4	NAME
			APPROVED	KENNY
			DESIGNER	GRACE
			DRAWN	JINDAR



TITLE: 2.0 Pitch Housing 2Rows 7.3L			
DWG.NO: HGXXYENY1-44		REV. A	
SCALE	1 : 1	SHEET	1 OF 1